

## UCS. Deleting the entry completely from the system

When you create a UCS client multiple programs are used. If there are some issues, it can be useful to completely remove all entries and program again. On older versions of software, entries may need deleting manually

### PGM 446 delete entry

Select index

System Data	UCS Client Index 1-100
Web Access Authorization	(*) : Required Input Item
UCS Data	
UCS Standard Client Login(446)	
UCS Premium Client Login(446)	

<input type="checkbox"/>	Index	Station Number (*)	Master Number	Member1 Number	Member2 Number	User ID (*)	User Password (*)	Name (*)
<input checked="" type="checkbox"/>	1	1020				1020	*****	Peter
<input type="checkbox"/>	2							
<input type="checkbox"/>	3							
<input type="checkbox"/>	4							

Press Delete

nt (*)	E-mail Address (*)	Linked Pair	Unique II
	test@test.com	OFF	▼

### PGM 443

Check that the entry has been deleted, if not delete the ID and save

System Data	<input type="checkbox"/>	Index	Registered Number	Device Type	ID	Password
Station Group Data	<input type="checkbox"/>	1	1010	IP DECT-150	1010	*****
ISDN Line Data	<input type="checkbox"/>	2	1011	IP DECT-150	1011	*****
SIP Data	<input type="checkbox"/>	3	1012	IP DECT	1012	*****
Tables Data	<input type="checkbox"/>	4	1020	UCS-Client	1020	*****
Networking Data	<input type="checkbox"/>	5				
H.323 Routing Table	<input type="checkbox"/>	6				
T-NET Data	<input type="checkbox"/>	7				
Zone Data	<input type="checkbox"/>	8				
Device Login	<input type="checkbox"/>	9				
Remote Device Registration(442)	<input type="checkbox"/>	10				
Station User Login(443)	<input type="checkbox"/>	11				
	<input type="checkbox"/>	12				
	<input type="checkbox"/>	13				
	<input type="checkbox"/>	14				
	<input type="checkbox"/>	15				

## PGM 101

For UCS Client select Device Delete and Save

System ID & Numbering Plans

- System ID(100)
- System Overview
- Device Port Num Change(101)**
- System IP Plan(102)
- Device IP Plan(103)
- CO Device Sequence Number(104)
- Flexible Station Number(105)
- Flexible Numbering Plan(106~109)
- 8 Digit Extension Table(238)

Station Data

Board Based Data

CO Line Data

Order <u>J</u> <sup>a</sup>	Seq	Logical Num <u>J</u> <sup>a</sup>	Device Type	Device Reset	Device Delete
<b>A</b>					
CO Gateway					
1	2401	1 - 4	BRIU2	<input type="checkbox"/>	<input type="checkbox"/>
2	2402	5 - 8	VOIU	<input type="checkbox"/>	<input type="checkbox"/>
<b>B</b>					
STA					
1	1	1000 (Disconnected)	1050i	<input type="checkbox"/>	<input type="checkbox"/>
2	2	1001 1002	SLTU2	<input type="checkbox"/>	<input type="checkbox"/>
4	4	1004 (Disconnected)	1030i	<input type="checkbox"/>	<input type="checkbox"/>
5	6	1006 (Disconnected)	1030i	<input type="checkbox"/>	<input type="checkbox"/>
6	3	1010 (Disconnected)	IP DECT-150	<input type="checkbox"/>	<input type="checkbox"/>
7	5	1011 (Disconnected)	IP DECT-150	<input type="checkbox"/>	<input type="checkbox"/>
8	7	1012 (Disconnected)	IP DECT	<input type="checkbox"/>	<input type="checkbox"/>
9	8	1008 (Disconnected)	1030i	<input type="checkbox"/>	<input type="checkbox"/>
10	9	1020 (Out of Service)	UCS-Client	<input type="checkbox"/>	<input checked="" type="checkbox"/>

## PGM 260 Personal group

Check personal group for this UCS Client has been deleted. If not delete

Delete Master, Save, check box and delete Member, Save

System ID & Numbering Plans

Station Data

Board Based Data

CO Line Data

System Data

Station Group Data

- Station Group Overview
- Station Group Assignment(190)
- Station Group Attributes(191)
- Pick-Up Group Overview
- Pick-Up Group(192)
- Personal Group Overview
- Personal Group(260)**

Personal Group Number 1


Master Station :

Add/Delete Group Member

Station Range		
Add Station Number	<input type="text"/>	<input type="button" value="+"/>
<input type="button" value="Select All"/>		Station Num
<input checked="" type="checkbox"/>	<input type="text" value="1020"/>	<input type="button" value="Save / Delete"/>


## Maintenance/Licence management

Check licence is set back to Device, if not change it here and Save

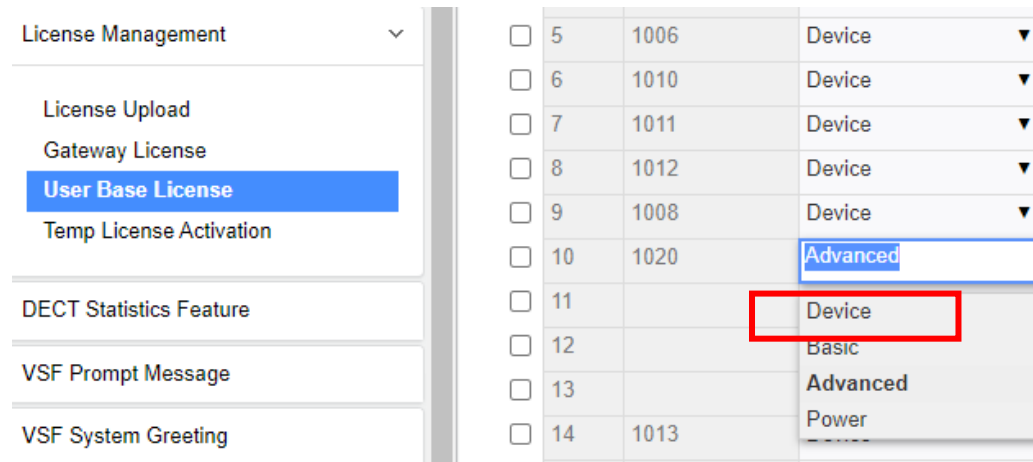

The screenshot shows the 'License Management' section of a web interface. On the left, there is a sidebar with a dropdown menu for 'License Management' and several options: 'License Upload', 'Gateway License', 'User Base License' (highlighted in blue), and 'Temp License Activation'. Below this are sections for 'DECT Statistics Feature', 'VSF Prompt Message', and 'VSF System Greeting'. The main area contains a table of licenses with columns for checkboxes, IDs (5-14), and license types. A dropdown menu is open for license ID 11, showing options: 'Device' (highlighted with a red box), 'Basic', 'Advanced', and 'Power'. The 'Advanced' option in the table is also highlighted with a blue box.

Checkbox	ID	License Type
<input type="checkbox"/>	5	1006 Device
<input type="checkbox"/>	6	1010 Device
<input type="checkbox"/>	7	1011 Device
<input type="checkbox"/>	8	1012 Device
<input type="checkbox"/>	9	1008 Device
<input type="checkbox"/>	10	1020 Advanced
<input type="checkbox"/>	11	Device
<input type="checkbox"/>	12	Basic
<input type="checkbox"/>	13	Advanced
<input type="checkbox"/>	14	1013 Power



Now reenter the UCS data.